


# PACKERS HP-T90°

## 2.4



Unique construction and excellent choice of rubber compound of Savatech packers HP-T90° provides excellent possibility of repairs in bents of pipelines of 45°, 60°, 90°. Rigid parts of Savatech packers HP-90° are made as short as possible in order to ease insertion and pulling packers through pipeline bends. Having in mind problems that arise at inserting and pushing packers through pipeline bends the rigid parts of packer ends are made as short as possible.

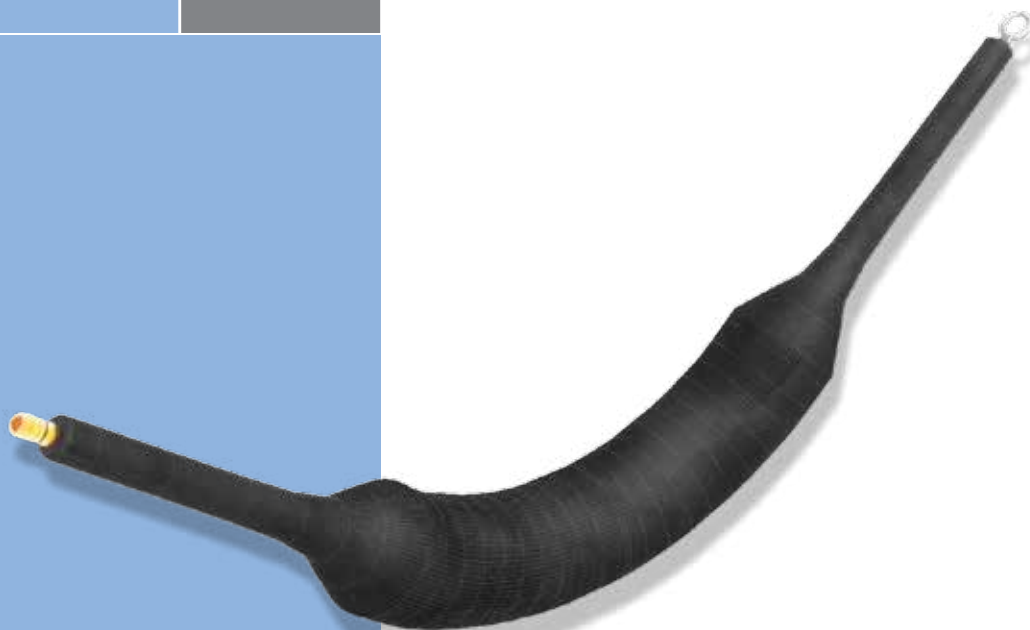

SUITABLE FOR PIPE  
REPAIRS IN ANGLES  
45°-90°

### PACKERS HP-T90°

Part number	Nominal size		Size usage range		Required inflation pressure (bar)	Product weight (kg)	Rubber body length (mm)	Deflated packer	
	EU	m	Min. dia. (mm)	Max. dia. (mm)				Diameter (mm)	Length (mm)
281856	35-50	0.7	35	50	3	0.8	700	26	750
558628	50-70	0.7	50	70	2	0.7	600	30	750
281774	70-80	0.6	70	80	2	0.8	550	45	650
525957	70-80	1	70	80	2	0.9	1000	45	1120
525958	70-80	1.5	70	80	2	1.2	1500	45	1620
525960	100-125	1	100	125	2	2	1000	65	1120
525961	100-125	1.5	100	125	2	2.8	1500	65	1620
525963	150-165	1	150	165	2	3.2	1000	85	1120
525964	150-165	1.5	150	165	2	4.1	1500	85	1620
525959	180-205	1	180	205	2	5.6	1000	105	1120
525962	180-205	1.5	180	205	2	6.1	1500	105	1620
281628	200-250	1	200	250	2	8.4	1000	130	1120
560617	200-250	1.5	200	250	2	10.5	1500	130	1620
282151	250-350	1.5	250	350	2	13.6	1500	140	1620